


BY系列路面铣刨机截齿

优越的性能

众多铣刨机客户的最佳选择

BY SERIES CUTTING PICKS

YOUR BEST CHOICE

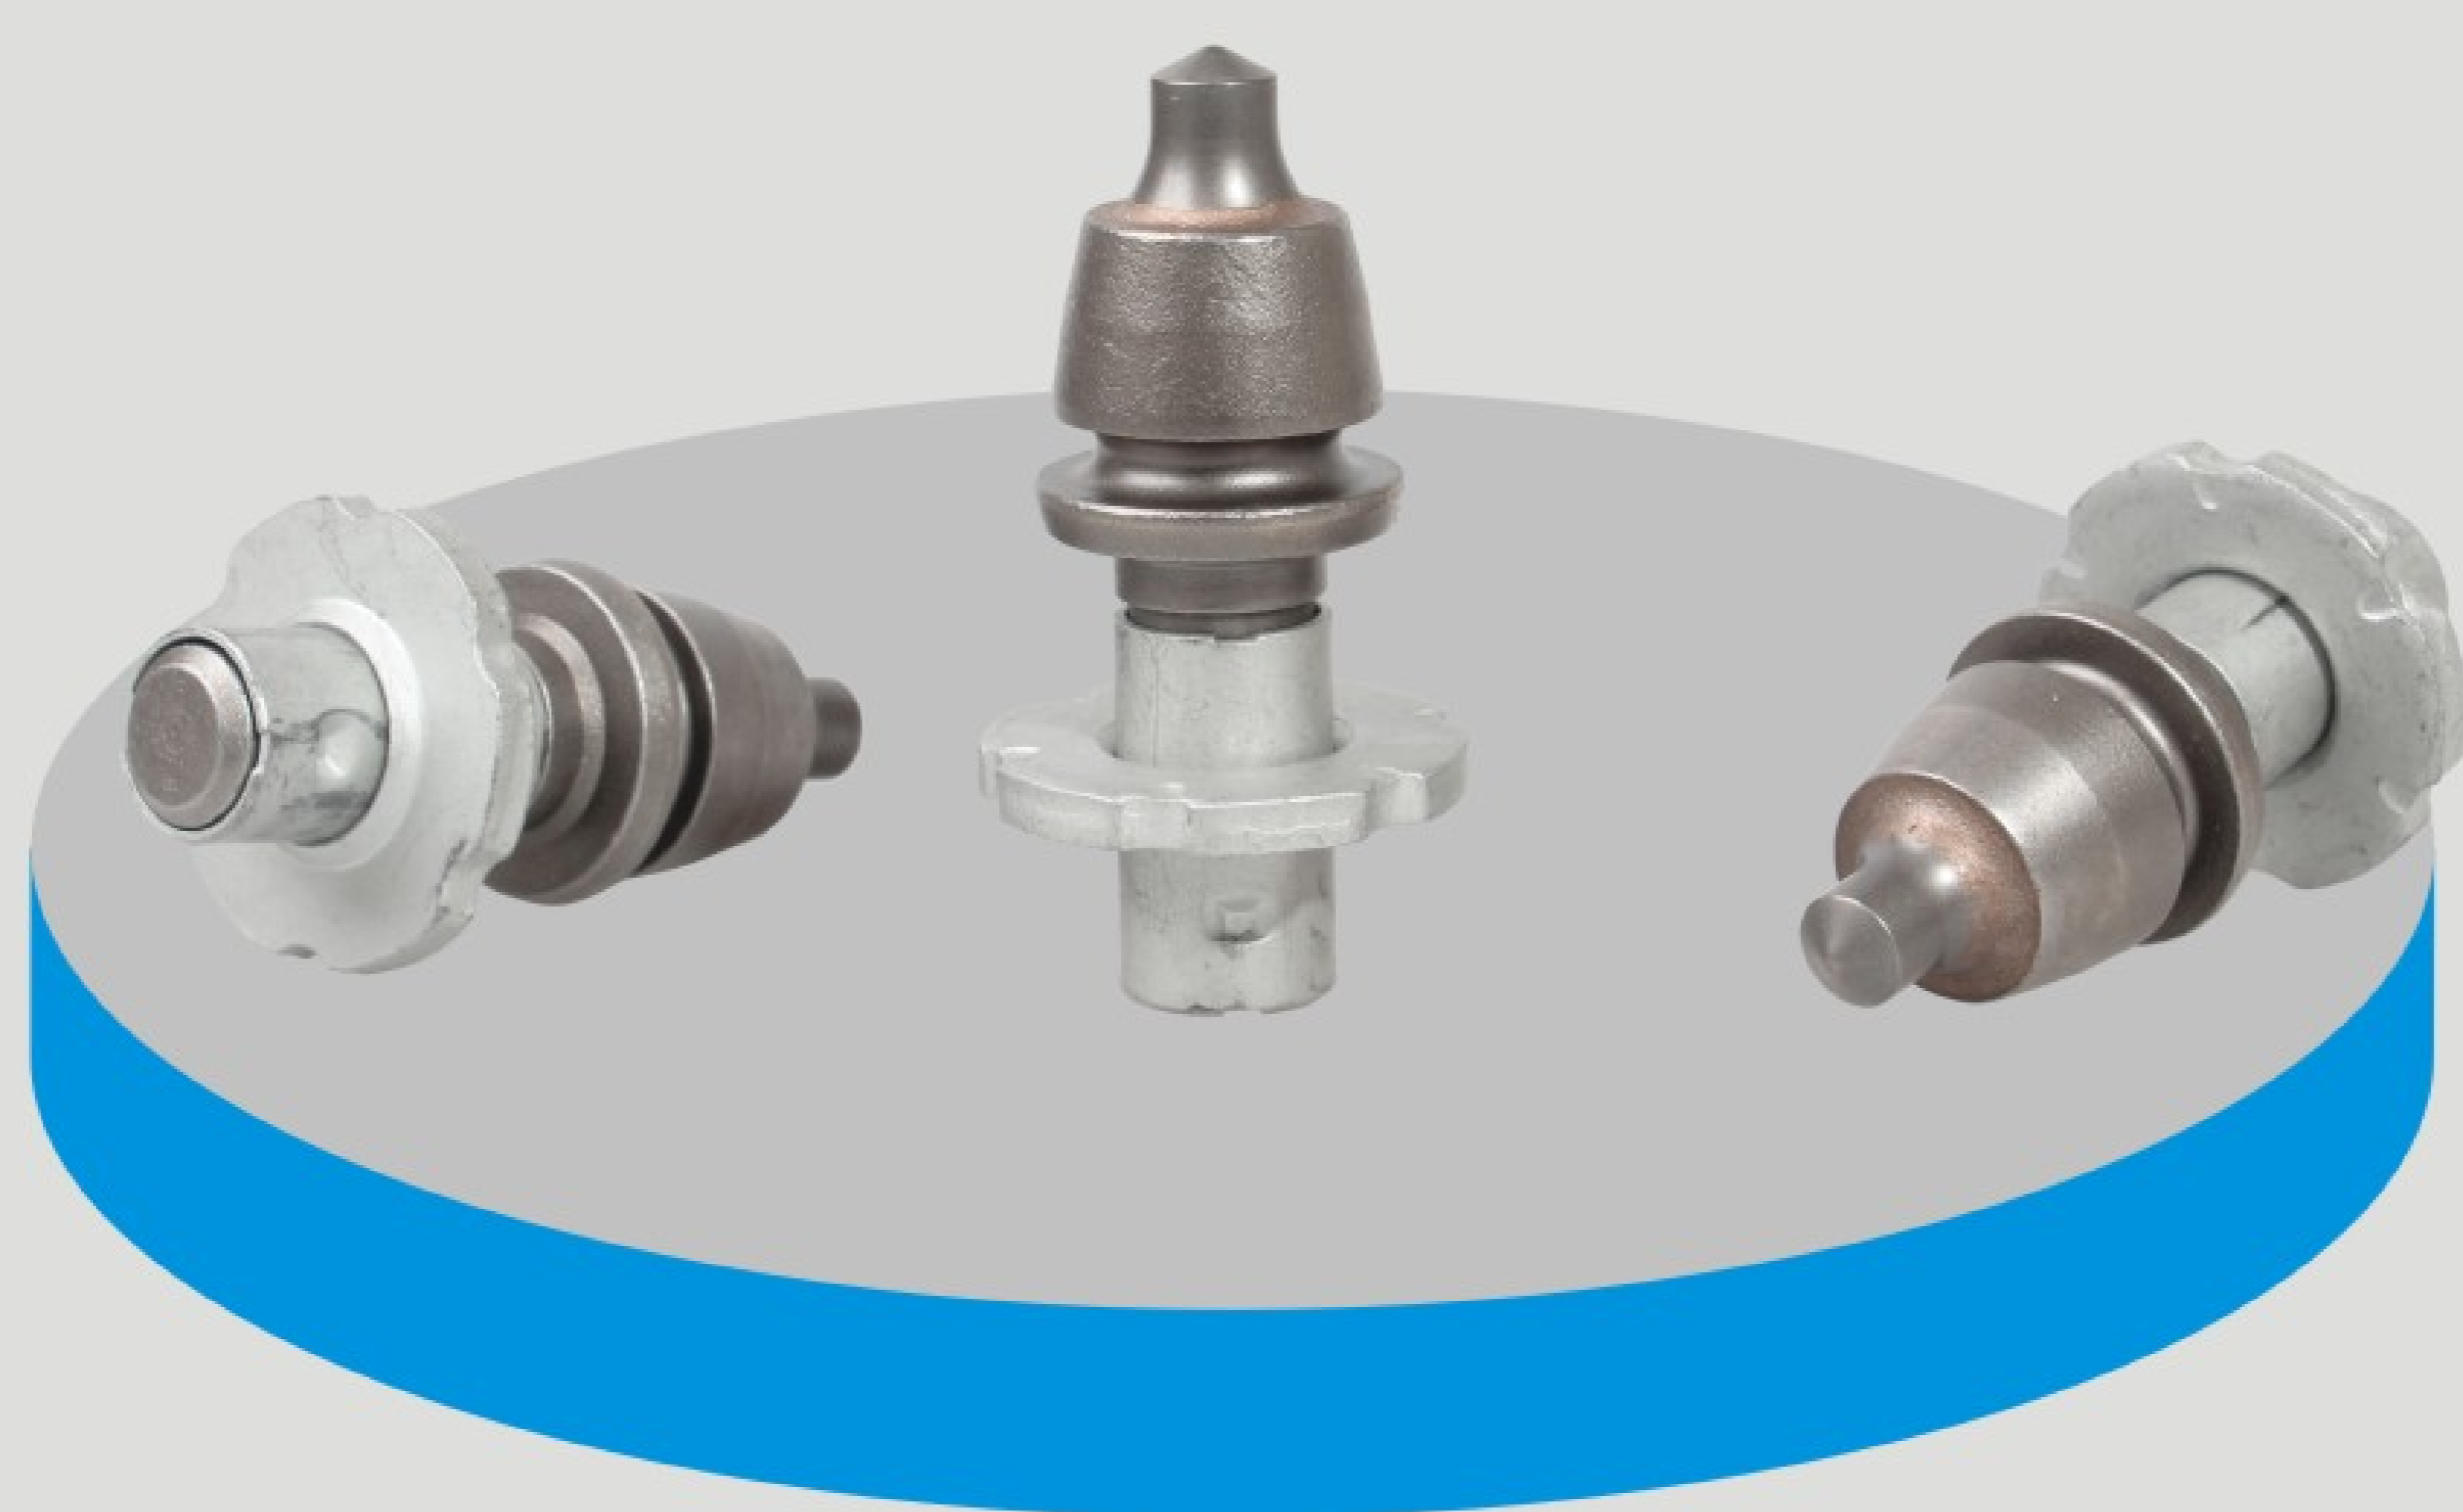

地址：江苏省镇江市丹徒区宝堰镇工业园区

Add:Industrial Park, Baoyan Town,

Dantu District, Zhenjiang, Jiangsu Province, China.

电话/Tel:+86 0511-84481268

传真/Fax:+86 0511-84480268

手机/Mob:+86 13815478188

E-mail: tieying6613@163.com


中文官网：www.bypicks.com

阿里国际站：www.supersoar-by.en.alibaba.com

阿里中文站：http://bycuttingpick.1688.com

BY系列路面铣刨机截齿

产品特点 Product feature

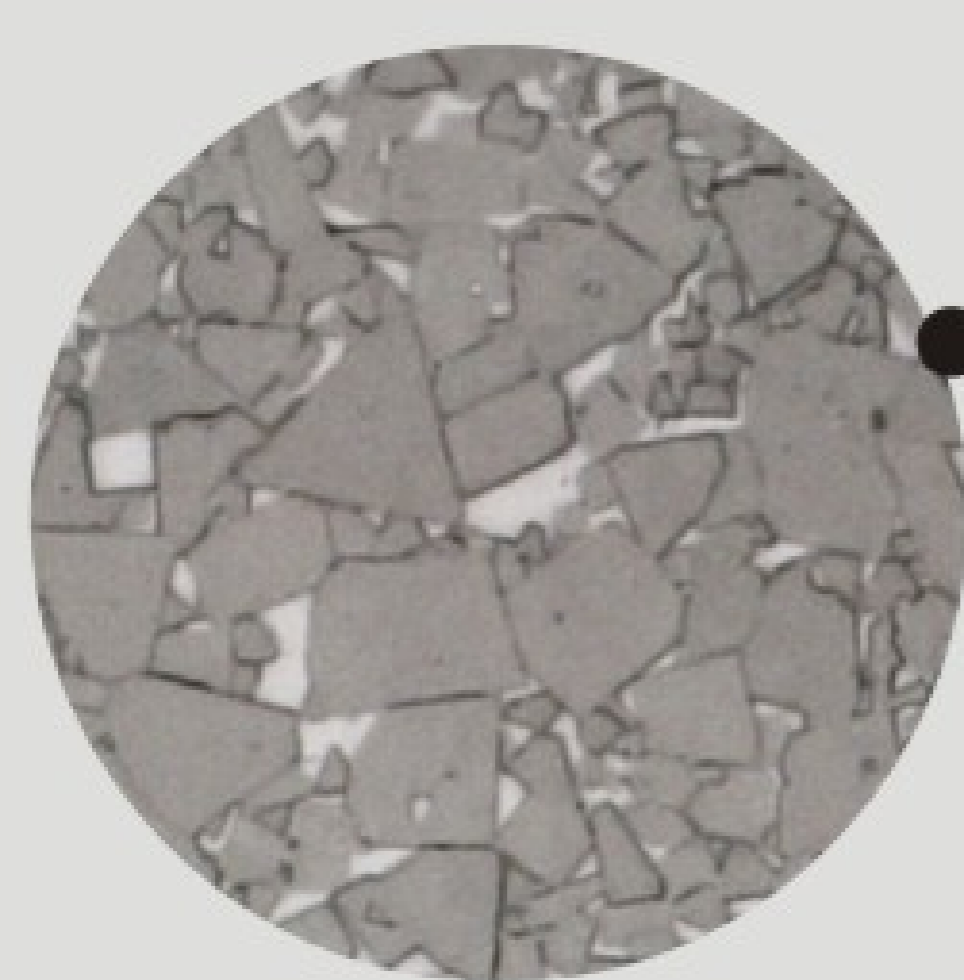

1. 显微镜下的碳化物
The carbide under the microscope

2. 钴与碳化物颗粒粘结在一起，
形成抗冲击性。
The cobalt combined with the granule of
the carbide make a good resistance to impact.

3. 碳化物硬度很高，具有耐磨性，
约占刀尖比重的94%。
The high hardness of the carbide has
good abrasive resistance, about 94%
of the head of the cutting pick.



使用自主研发的高温焊料，焊接
温度高达1100℃以上，防止
在铣削过程中产生高温致使刀尖
脱落。


Using the independent development high
temperature solder. The welding temperature
can be more than 1100℃, to prevent the
head of the cutting pick to fall off
because of the high temperature during the
milling.

利用先进的热处理工艺，使
产品形成上下部分两节硬度。

● 上部硬度为HRC52以上，
● 下部硬度为HRC42左右，
有效地降低上部在工作中的
磨损，防止高强度冲击下下
部断裂。

Using the advanced heat-treatment technology to depart the
product to 2 sections with different hardness. The hardness
of upper section is more than HRC52
The hardness of lower section is HRC42. It can decrease abrasion
of the upper section effectively, and prevent the low section
break from the high strength impact.

工作寿命 Working life

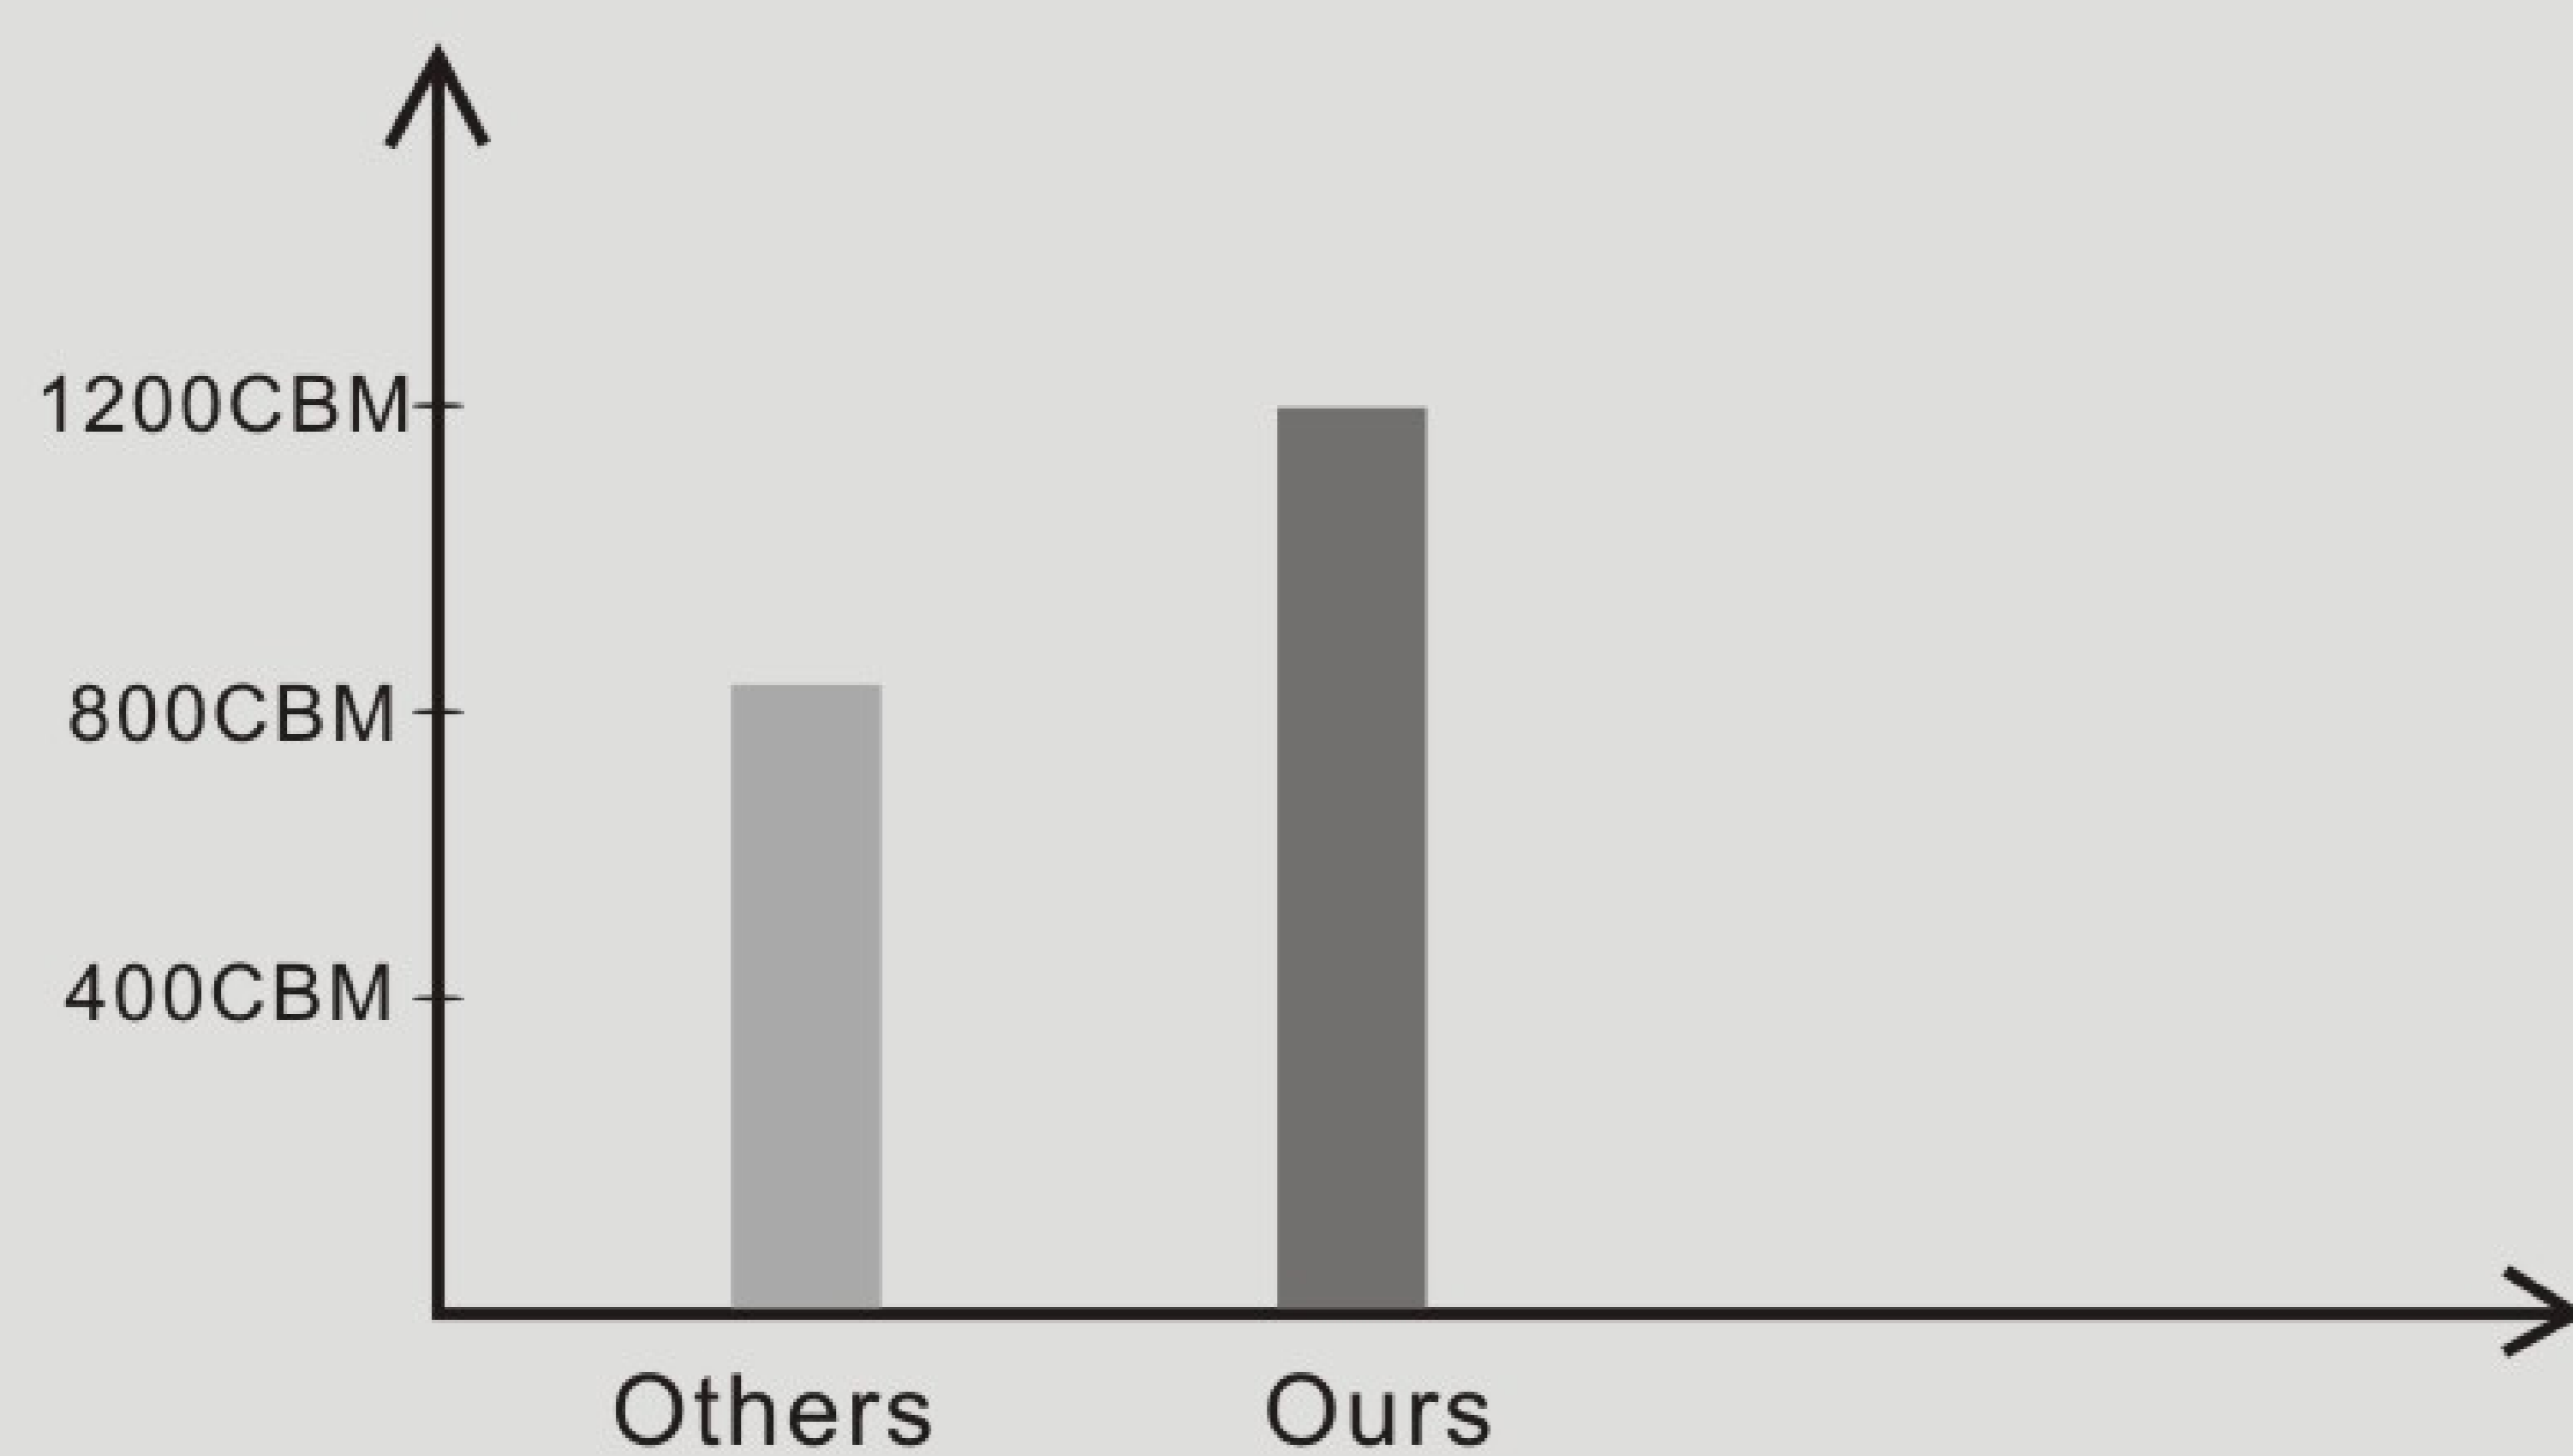

在过去的两年内，经过许多客户在不同情况的路面上的使用情况，我们得到我们的截齿实际的工作产能为1200方（以两米机计算），此产能已经超出国内同类产品的30%至50%。

After working on different models machine in different roads by many customers in the past 2 years, we got the real working life is 1200cubic meters(calculating on the machine with 2meters working width), this capacity is almost 30%to 50% efficiency increased compare to other domestic congeneric products.

地址：江苏省镇江市丹徒区宝堰镇工业园区

Add:Industrial Park, Baoyan Town,

Dantu District, Zhenjiang, Jiangsu Province, China.

电话/Tel:+86 0511-84481268

传真/Fax:+86 0511-84480268

手机/Mob:+86 13815478188

E-mail: tieying6613@163.com

中文官网：www.bypicks.com

阿里国际站：www.supersoar-by.en.alibaba.com

阿里中文站：http://bycuttingpick.1688.com

工艺流程 PRODUCTION PROCESS



热锻
HOT FORGING




机加工
MACHINING



焊接
WELDING



热处理
HEAT-TREATMENT

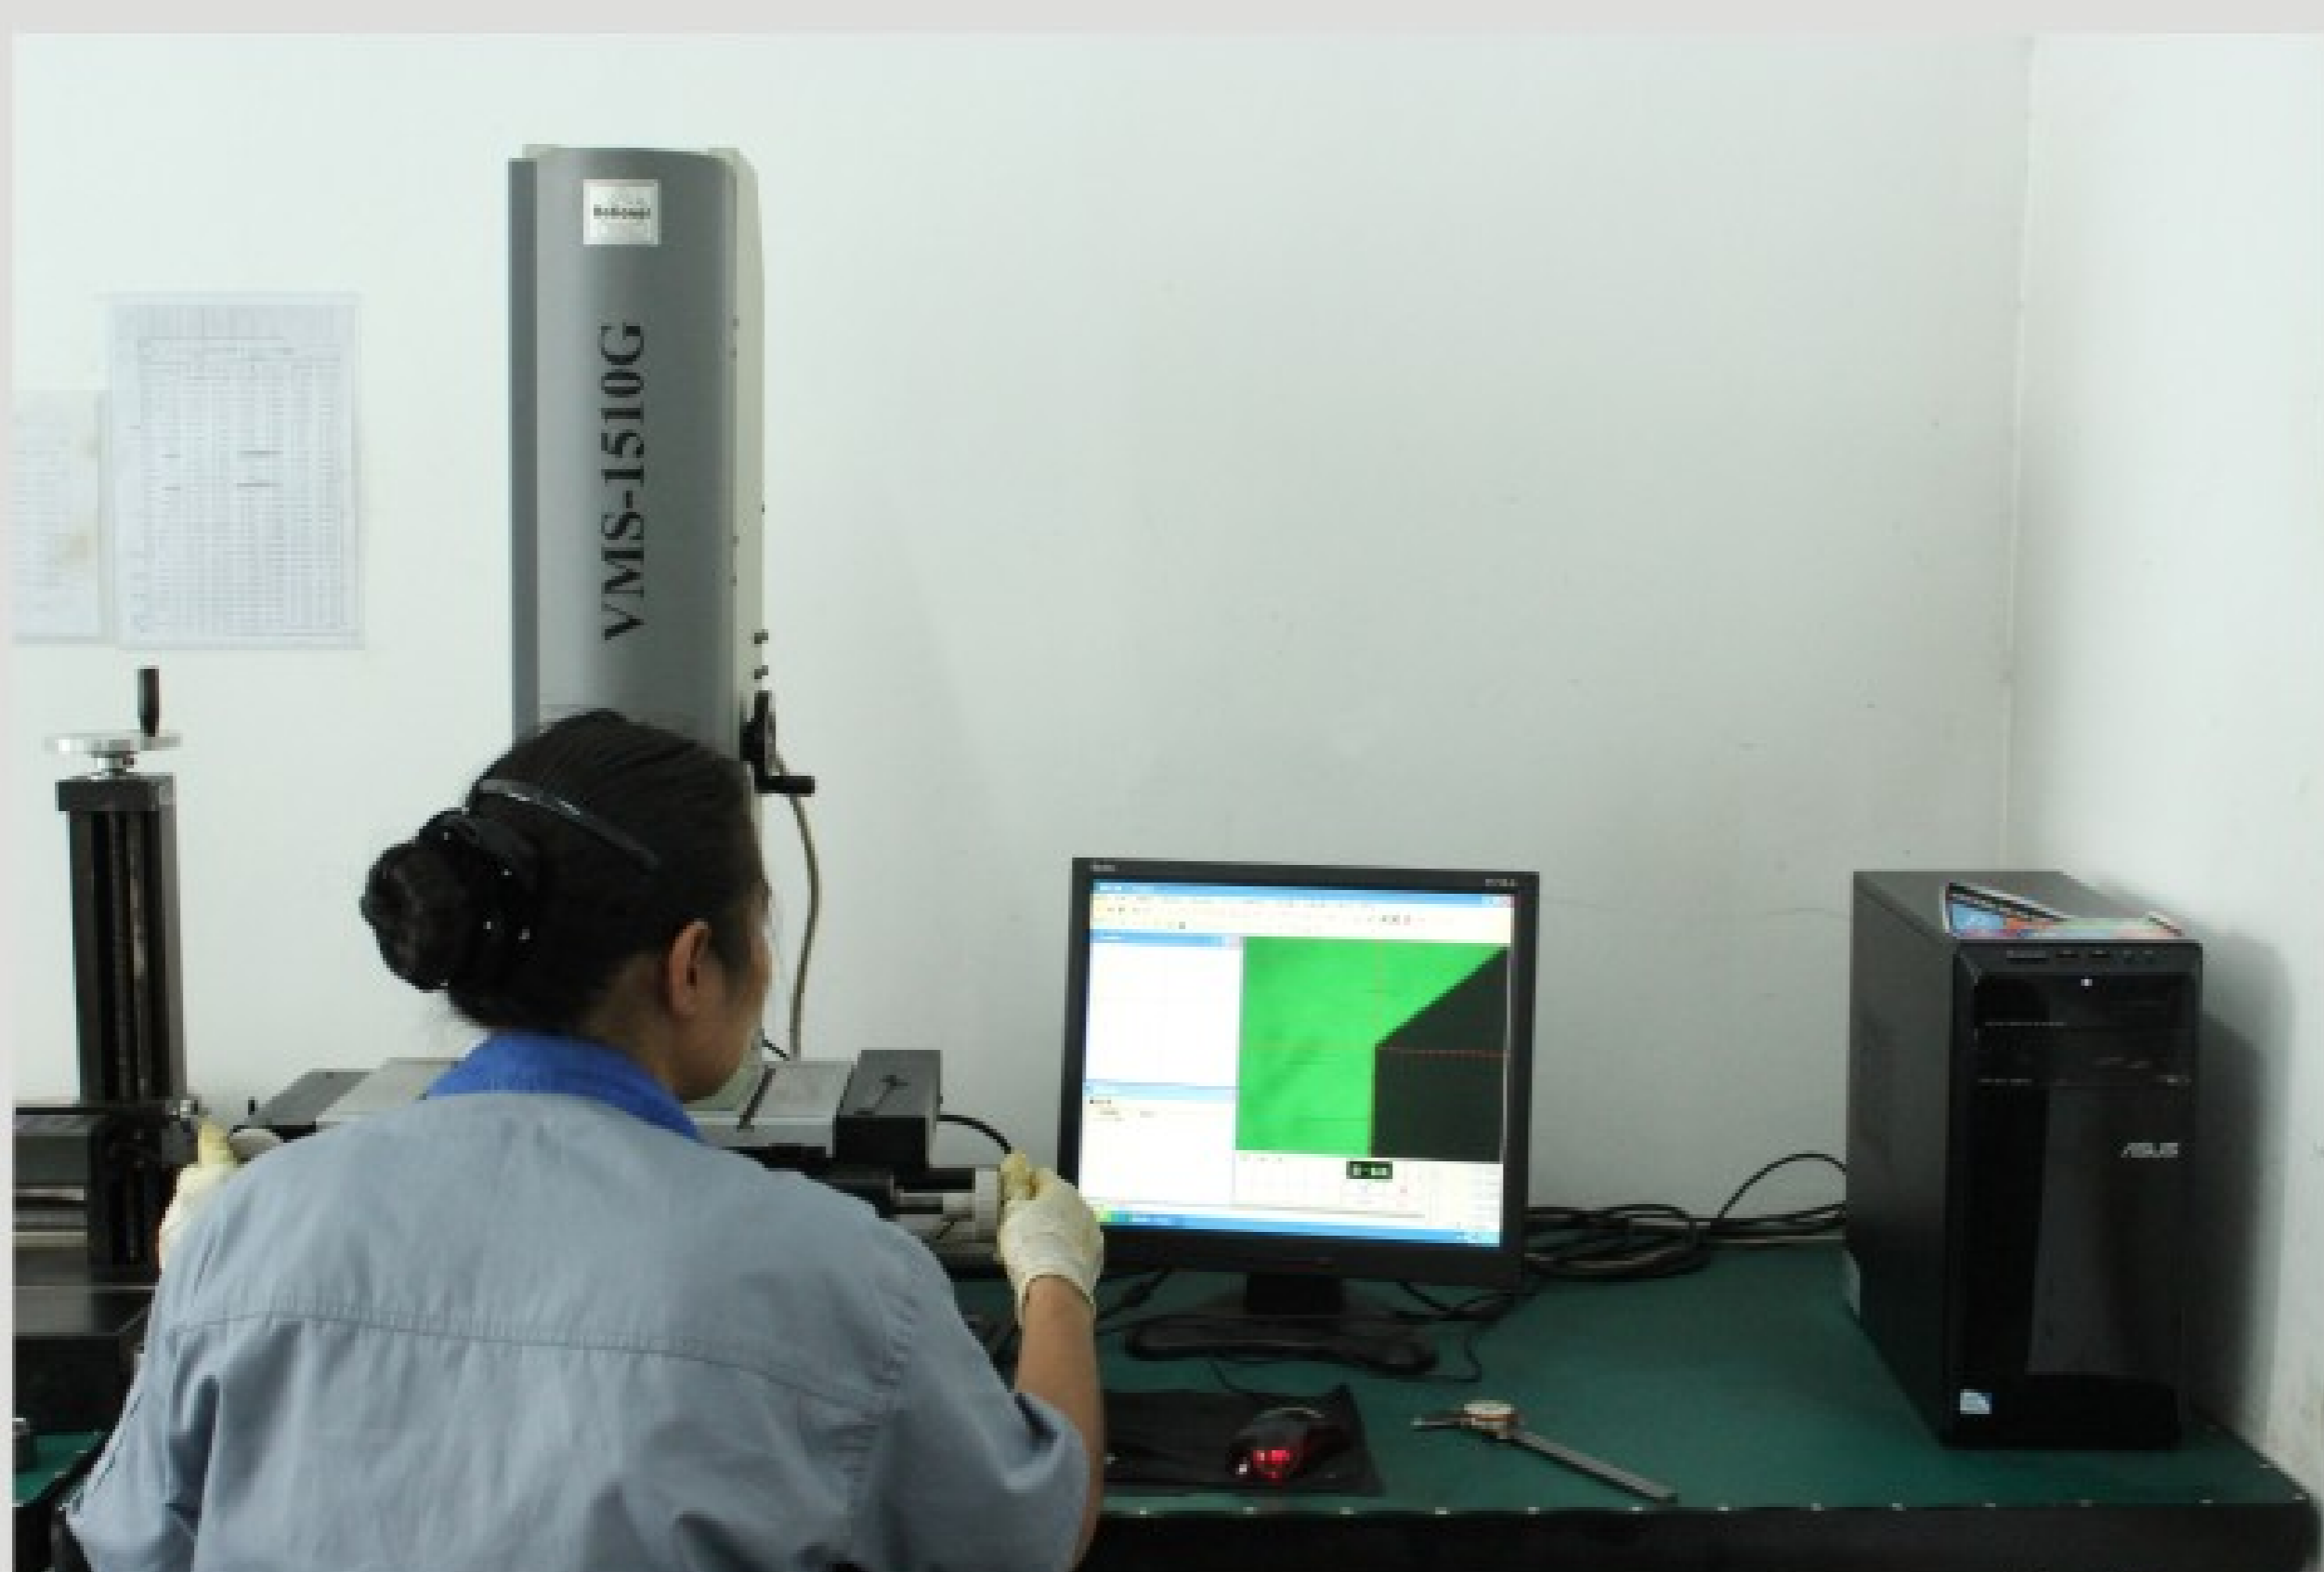

质检
INSPECTING



测试
TESTING

地址：江苏省镇江市丹徒区宝堰镇工业园区

Add:Industrial Park, Baoyan Town,

Dantu District, Zhenjiang, Jiangsu Province, China.

电话/Tel:+86 0511-84481268

传真/Fax:+86 0511-84480268

手机/Mob:+86 13815478188

E-mail: tieying6613@163.com

中文官网：www.bypicks.com

阿里国际站：www.supersoar-by.en.alibaba.com

阿里中文站：http://bycuttingpick.1688.com













宝堰
BAO YAN

镇江宝堰工程机械有限公司
Zhenjiang Baoyan Engineering Machinery Co.,Ltd

常规产品 POPULAR PRODUCT

路面截齿系列 CUTTING PICKS








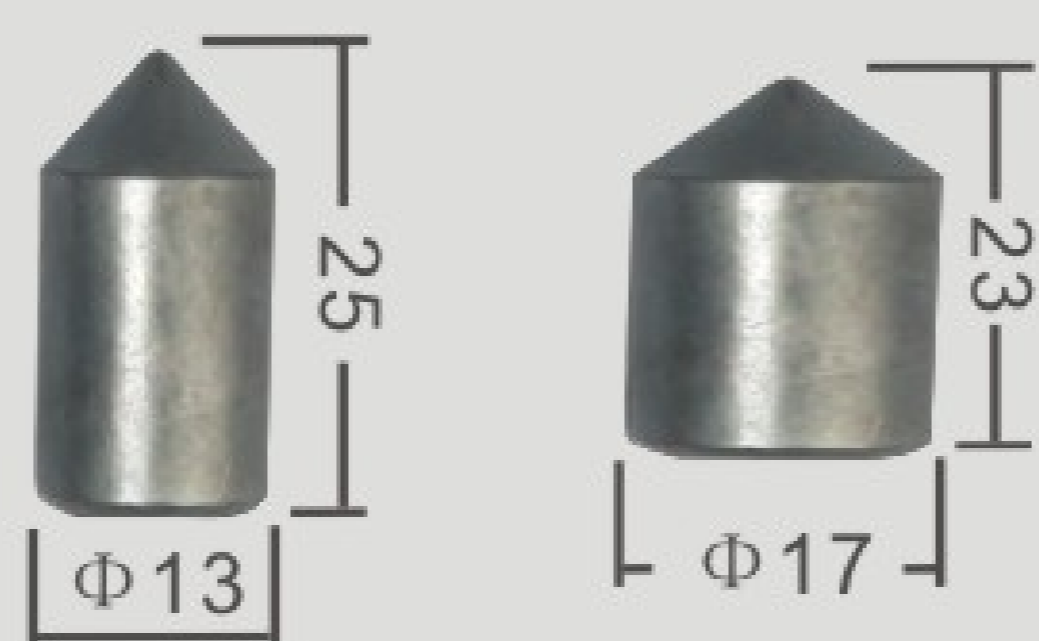




Model	Details of Carbide Tip	Application
 <p>BY4-G/20</p>		<p>特性：适用于小型机，用于沥青路面的铣刨</p> <p>型号：BY4/20(无退拔槽) 对应维特根型号：W4/20</p> <p>型号：BY4-G/20(带退拔槽) 对应维特根型号：W4-G/20</p> <p>Feature: Apply to small machinery, asphalt pavement construction</p> <p>Model: BY4/20 Without pullout slot Wirtgen Model: W4/20</p> <p>Model: BY4-G/20 With pullout slot Wirtgen Model: W4-G/20</p>
 <p>BY6/20W</p>		<p>特性：适用于中型机，用于沥青路面的铣刨</p> <p>型号：BY6/20W(无退拔槽) 对应维特根型号：W6/20X</p> <p>Feature: Apply to medium machinery, asphalt pavement construction.</p> <p>Model: BY6/20W Without pullout slot Wirtgen Model: W6/20X</p>
 <p>BY6-G/20W</p>		<p>特性：适用于中型机，用于沥青路面的铣刨</p> <p>型号：BY6-G/20W(带退拔槽) 对应维特根型号：W6-G/20X</p> <p>Feature: Apply to medium machinery, asphalt pavement construction.</p> <p>Model: BY6-G/20W With pullout slot Wirtgen Model: W6-G/20X</p>
 <p>BY7/20W</p>		<p>特性：适用于中型机，用于沥青路面的铣刨</p> <p>型号：BY7/20W(无退拔槽) 对应维特根型号：W7/20X</p> <p>Feature: Apply to medium or large machinery, asphalt pavement construction.</p> <p>Model: BY7/20W Without pullout slot Wirtgen Model: W6M/20X W7/20X</p>
 <p>BY7-G/20W</p>		<p>特性：适用于中型机，用于沥青路面的铣刨</p> <p>型号：BY7-G/20W(带退拔槽) 对应维特根型号：W7-G/20X</p> <p>Feature: Apply to medium or large machinery, asphalt pavement construction.</p> <p>Model: BY7-G/20W With pullout slot Wirtgen Model: W6M-G/20X W7-G/20X</p>



宝堰
BAO YAN

镇江宝堰工程机械有限公司

Zhenjiang Baoyan Engineering Machinery Co.,Ltd

Model	Details of Carbide Tip	Application
 <p>BY8/20W</p>		<p>特性：适用于大型机，用于沥青路面和水泥路面的铣刨</p> <p>型号：BY8/20W (无退拔槽)</p> <p>对应维特根型号：W8/20X</p> <p>Feature: Apply to large machinery, asphalt pavement or cement road construction.</p> <p>Model: BY8/20W Without pullout slot</p> <p>Wirtgen Model: W8/20X</p>
 <p>BY8-G/20W</p>		<p>特性：适用于大型机，用于沥青路面和水泥路面的铣刨</p> <p>型号：BY8-G/20W (有退拔槽)</p> <p>对应维特根型号：W8-G/20X</p> <p>Feature: Apply to large machinery, asphalt pavement or cement road construction.</p> <p>Model: BY8-G/20W With pullout slot</p> <p>Wirtgen Model: W8-G/20X</p>
 <p>BY1-14-G/20W</p>		<p>特性：适用于多种机型，用于水泥路面的铣刨</p> <p>型号：BY1-14-G/20W (带退拔槽)</p> <p>对应维特根型号：W1-13-G/20X</p> <p>Feature: Apply to varies type of machine for cement road construction.</p> <p>Model: BY1-14-G/20W</p> <p>Wirtgen Model: W1-13-G/20X</p>
 <p>BY1-13/22X BY1-17/22X</p>		<p>特性：适用于冷再生机型</p> <p>型号：BY1-13/22X, 合金直径13mm</p> <p>对应维特根型号：W1-13/22X</p> <p>型号：BY1-17/22X, 合金直径17mm</p> <p>对应维特根型号：W1-17/22X</p> <p>Feature: Apply to cold recycling and soil stabilization.</p> <p>Model: BY1-13/22X The diameter of the carbide tip is 13mm.</p> <p>Wirtgen Mode: W1-13/22X</p> <p>Model: BY1-17/22X The diameter of the carbide tip is 17mm.</p> <p>Wirtgen Model: W1-17/22X</p>
 <p>BY1-6/22X</p>		<p>特性：适用于冷再生机型</p> <p>型号：BY1-6/22X</p> <p>对应维特根型号：W1-6/22X</p> <p>Feature: Apply to cold recycling and soil stabilization.</p> <p>Model: BY1-6/22X</p> <p>Wirtgen Model: W1-6/22X</p>
 <p>BYRL09/20</p>		<p>特性：适用于开沟机</p> <p>型号：BYRL09/20</p> <p>对应凯南迈特型号：RL09</p> <p>Feature: Apply for trencher to dig the canal</p> <p>Model: BYRL09/20</p> <p>Kennametal Model: RL09</p>

刀座系列
TOOL HOLDER


型号Model	BY-HT11
截齿安装直径 (Installing dia.)	D 20/D 22



型号Model	BY-HT22
截齿安装直径 (Installing dia.)	D 20/D 22



型号Model	BT02
截齿安装直径 (Installing dia.)	D 20

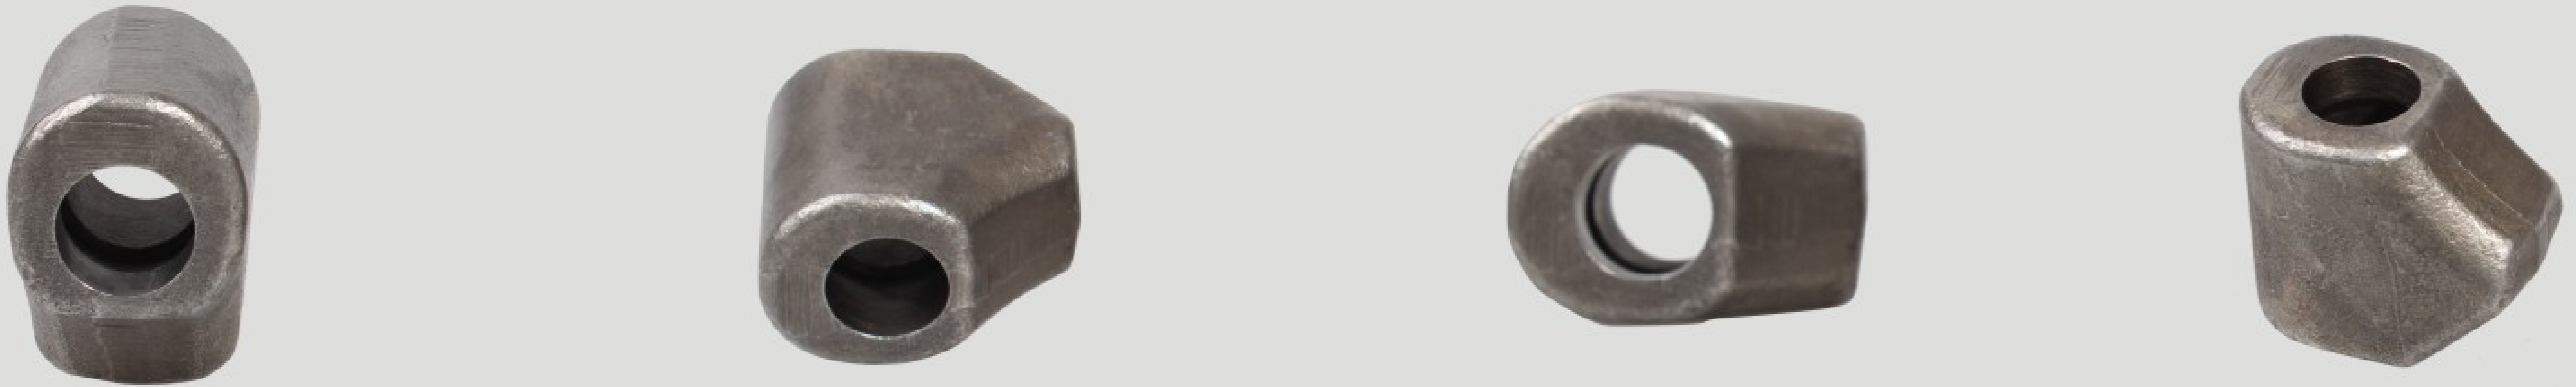

型号Model	BYKPF-303R
截齿安装直径 (Installing dia.)	D 20/D 22



刀座配件
ACCESSORIES OF TOOL HOLDER



如需更多的信息请登录我们的官方网站，www.bypicks.com